



exponent™

Phad X²™

part number 2000000456

POLE ASSEMBLY PARTS

Main Tent Poles (Silver)

Part No. 9830-1151

Side Pole (Red)


Part No. 9830-1251

Rainfly


Part No. 9830-1371

1 Layout & Positioning of Rainfly, Pole Assembly

- Layout and position Rainfly with doors facing desired direction. (illus. 1) Unzip doors.
- For best results in windy conditions, position back of tent into the wind.
- Stake down rear tent corners. (illus. 1)
- Assemble frame poles by interlocking the shock-corded sections. This will make two long silver Main Tent Poles and one red Side Pole.
- Insert the cap end of the two Main Tent Poles through the poles sleeves with the silver trim.
- Insert the cap end of the red Side Pole through the pole sleeve with the red trim.

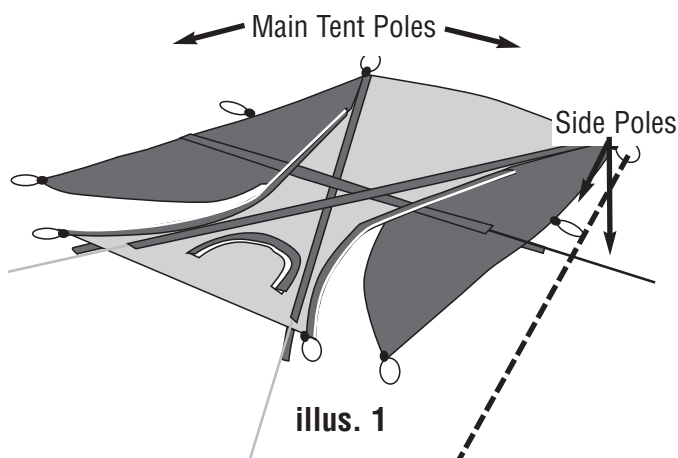


illus. 2
Tent stake through Loop



2 Assemble Frame

- Start with one of the Main Tent Poles and gradually apply pressure to the pole, forming an arch, until you are able to insert the pole tip into the grommet on the corner web. (illus. 4)
- Repeat for second pole.
- Go to the Side Pole and gradually apply pressure to the pole, forming an arch, until you are able to insert the pole tip into the grommet. (illus. 4)

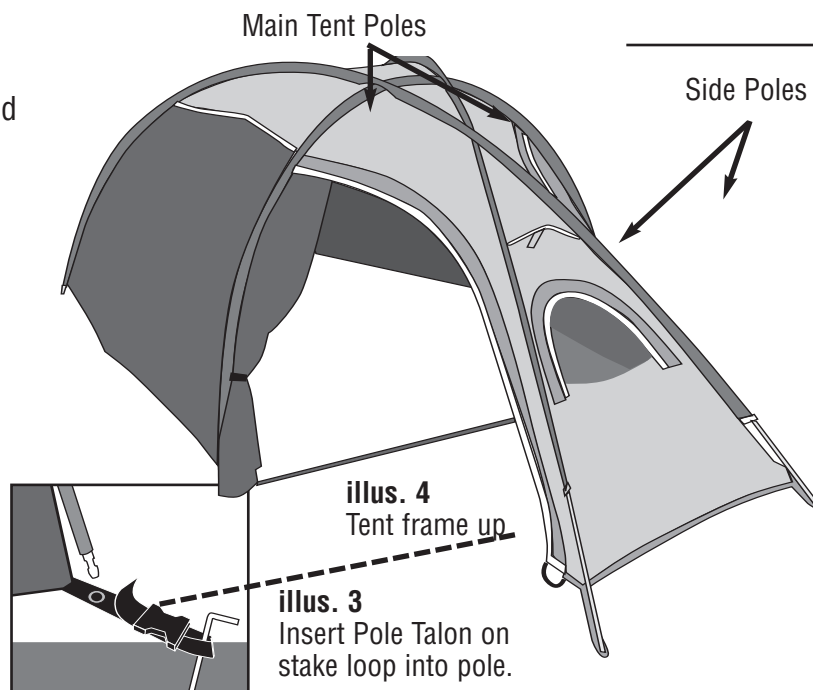

illus. 4
Tent frame up

illus. 3
Insert Pole Talon on stake loop into pole.

3 Attach Tent

- Layout the tent. (illus. 5)
- Position the tent in under the Rainfly
- Starting at the back of the tent, clip the tent to the Rainfly in the corners and then the side. (illus. 6)
- Attach the top of the tent to underside of the Rainfly with toggle and loops. (illus. 7)
- Optional ground cloth in vestibule can be removed at attached and clipped to the webbing at front of the Rainfly. (illus. 6)
- Stake out rainfly doors, keep rainfly taut. (illus. 8)
- Attach Guy Lines to Guy Wings on the sides of the Rainfly and stake out. (illus.8).



Things You Should Know

- Under certain conditions (cold weather, high humidity, etc.) condensation will form on the inside surfaces of your tent. Condensation is caused by water vapor from your breath, perspiration, or any wet clothing inside your tent. It is NOT LEAKAGE through the tent fabric. It can be minimized by removing wet clothing from your tent and by providing good ventilation through the tent.
- Seam sealer has not been provided with your tent. It is necessary and we recommend seam sealing your tent prior to camping. Seam sealer may be purchased through your local retailer or at your local sporting goods store.
- Never store tent, even for a short period of time, without drying it thoroughly and brushing off caked dirt. Do not pack stakes or poles inside your tent. Use separate storage bag.
- STAKES SHOULD BE REMOVED BY PULLING ON THE STAKE ITSELF. NEVER PULL ON THE TENT FABRIC OR TENT STAKE LOOP TO REMOVE STAKE.
- TENT POLES SHOULD NOT BE LEFT TELESKOPED TOGETHER DURING STORAGE.



exponent™

3600 N. Hydraulic • Wichita, Kansas 67219
1-800-835-3278 • www.coleman.com